




- ELECTRICAL TEST:
- 1.100% OPEN SHORT MIS WIRE TEST
 - 2.CONTACT RESISTANCE:5 OHM MAX
 - 3.INSULATION RESISTANCE:5M OHM MIN
 - 4.HI-POT TEST:DC 300V/10ms
 - 5.Pass the 1600*1200/1920*1080 test

VGA M
Nickel plated

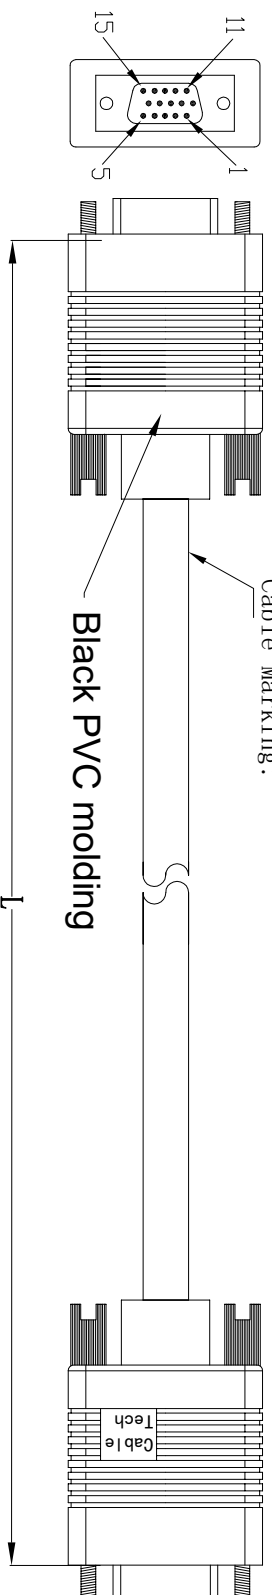

CONSUMER ITEM	LENGTH (mm)	CODING	packing
VGA1920-M/M-1	1000 ±20	381-005	BJ381-0010
VGA1920-M/M-2	2000 ±20		BJ381-0011
VGA1920-M/M-3	3000 ±30		BJ381-0012
VGA1920-M/M-5	5000 ±50		BJ381-0013
VGA1920-M/M-8	8000 ±50		BJ381-0014
VGA1920-M/M-10	10000 ±100	BJ381-0015	BJ381-0016
VGA1920-M/M-15	15000 ±100	BJ381-0017	
VGA1920-M/M-20	20000 ±100		

PIN ASSIGNMENT

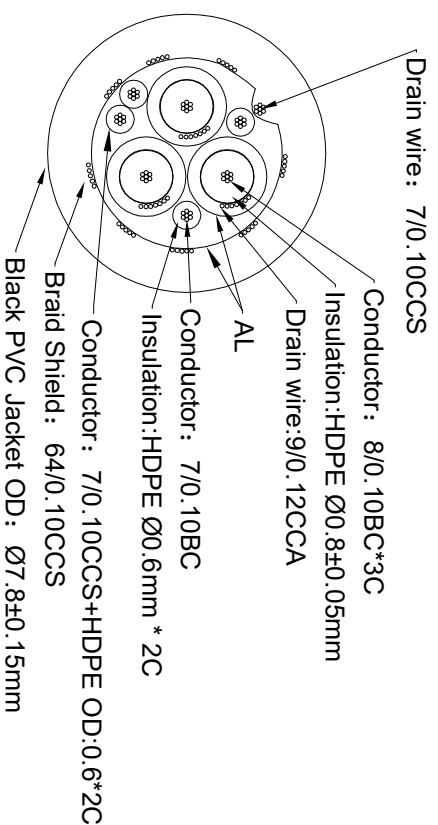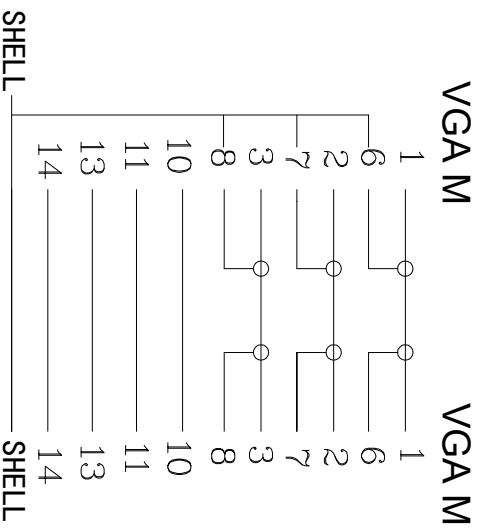

Cable Tech

APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO.	DESCRIPTION	FINISHED PRODUCTS FIGURE	SCALE	FIT	UNITS: MM	IRD ANGLE
		HENRY	<i>L.R.R</i>		MODEL NO.	HV1001A 3+4	△			
				381-005	FINISHING		△		2017/07/19	A1
					MATERIAL			SYM	DATE	REVISION

QR-025 2007.05.03, A1